DRC. No.

SHEET OF

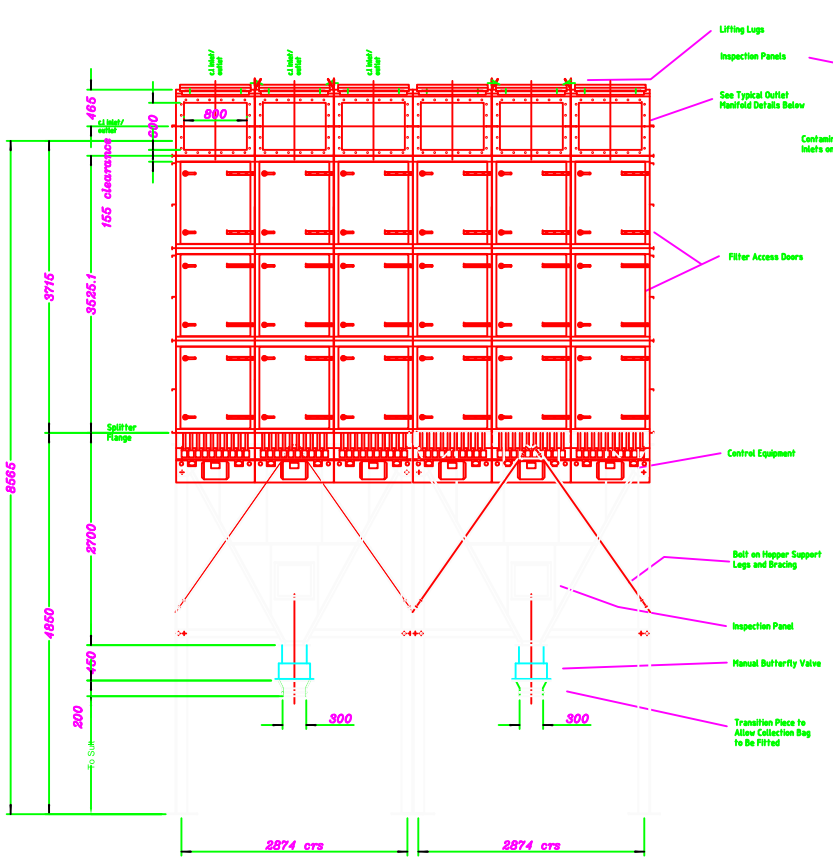

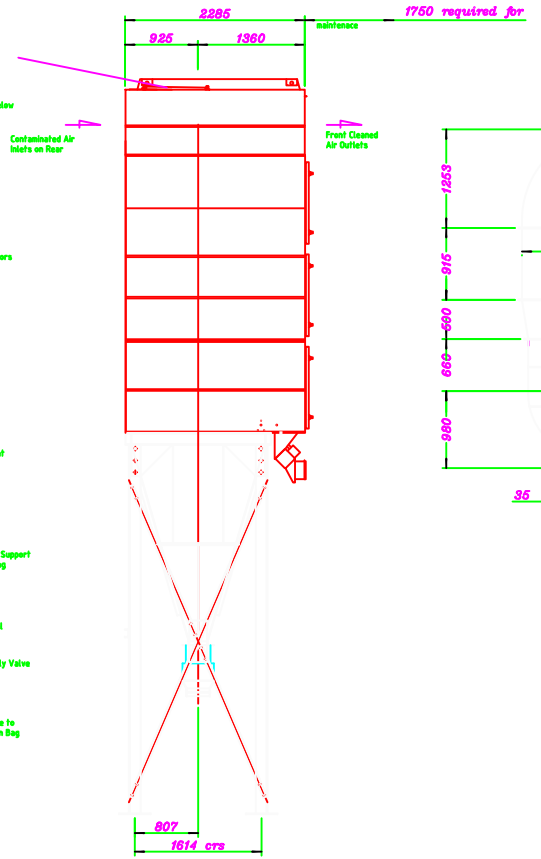

End Elevation

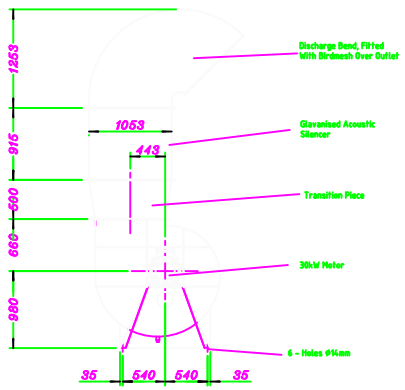

Elevation

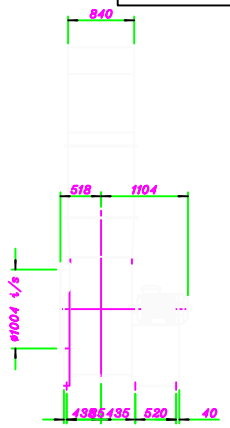

End Elevation

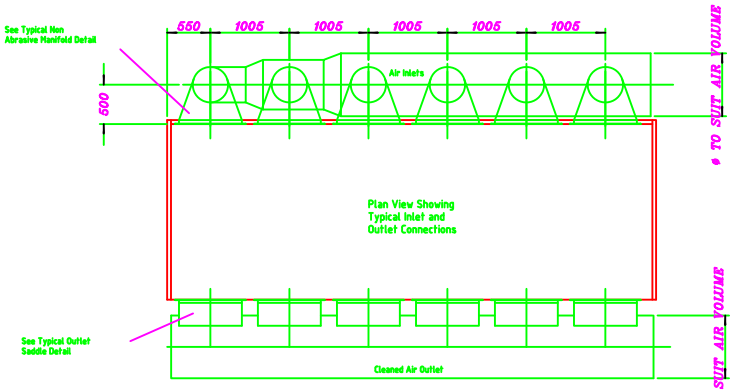

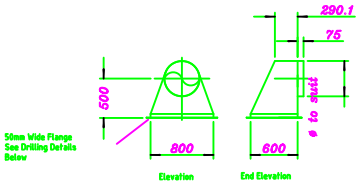

Typical Detail of Non Abrasive Inlet
6 - Required
(Not Supplied)



Typical Detail of Outlet Saddles
6 - Required
(Not Supplied)

Filter Unit Details

Specification: -

Filter Reference: JFS DLM 6-7-15
Filter Area: 630m²
Air to Media Ratio: 7.5 (2.3m/min)
Filter Configuration: Flat pad filters horizontally configured
Filter Media: Oleophobic
Filter Removal: Hinged access doors on cleaale side
Filter Cleaning System: Air tank mounted at low level with pulse diaphragm valves and blow bar assemblies
Pulse Controller: IPC DEL,TAP Digital pulse controller to IP66 spec
Compressed Air: 173.2m³/hr @6.2 barg (90psi)
Dirty Air Inlet: 6 - off rectangular flanged inlets
Cleaned Air Outlets: 6 - off rectangular flanged outlets
Dust Collection: Valley type hopper section
Manual Butterfly Discharge Valves
collection bag to be fitted
Support Steelwork: RSA & RSC bolt together sections
Weatherproofing: Standard

REV.	MODIFICATION	APPD.	DATE

FOUNDRY MACHINERY AND SPARES LTD

UNIT H
FRYERS CLOSE,
BLOXWICH, WALSALL,
WEST MIDLANDS.
WS3 2XQ

TEL: (01922) 493603
FAX: (01922) 713729

TITLE

DLM 6-7-15 Filter Plant

CLIENT

ITEM No.	DESCRIPTION.	MATL QTY.
DRAWN	DRAWING NO.	REV.
DATE	Q5424	
CHECKED		
SCALE	SHEET OF	

© THIS DRAWING IS THE PROPERTY OF FOUNDRY MACHINERY AND SPARES LTD & MAY NOT BE COPIED, REPRODUCED OR DISCLOSED TO ANY THIRD PARTY WITHOUT WRITTEN PERMISSION.